


SPEARHEAD


ROLLICUT 500/600



ROLLICUT 500/600 FEATURES

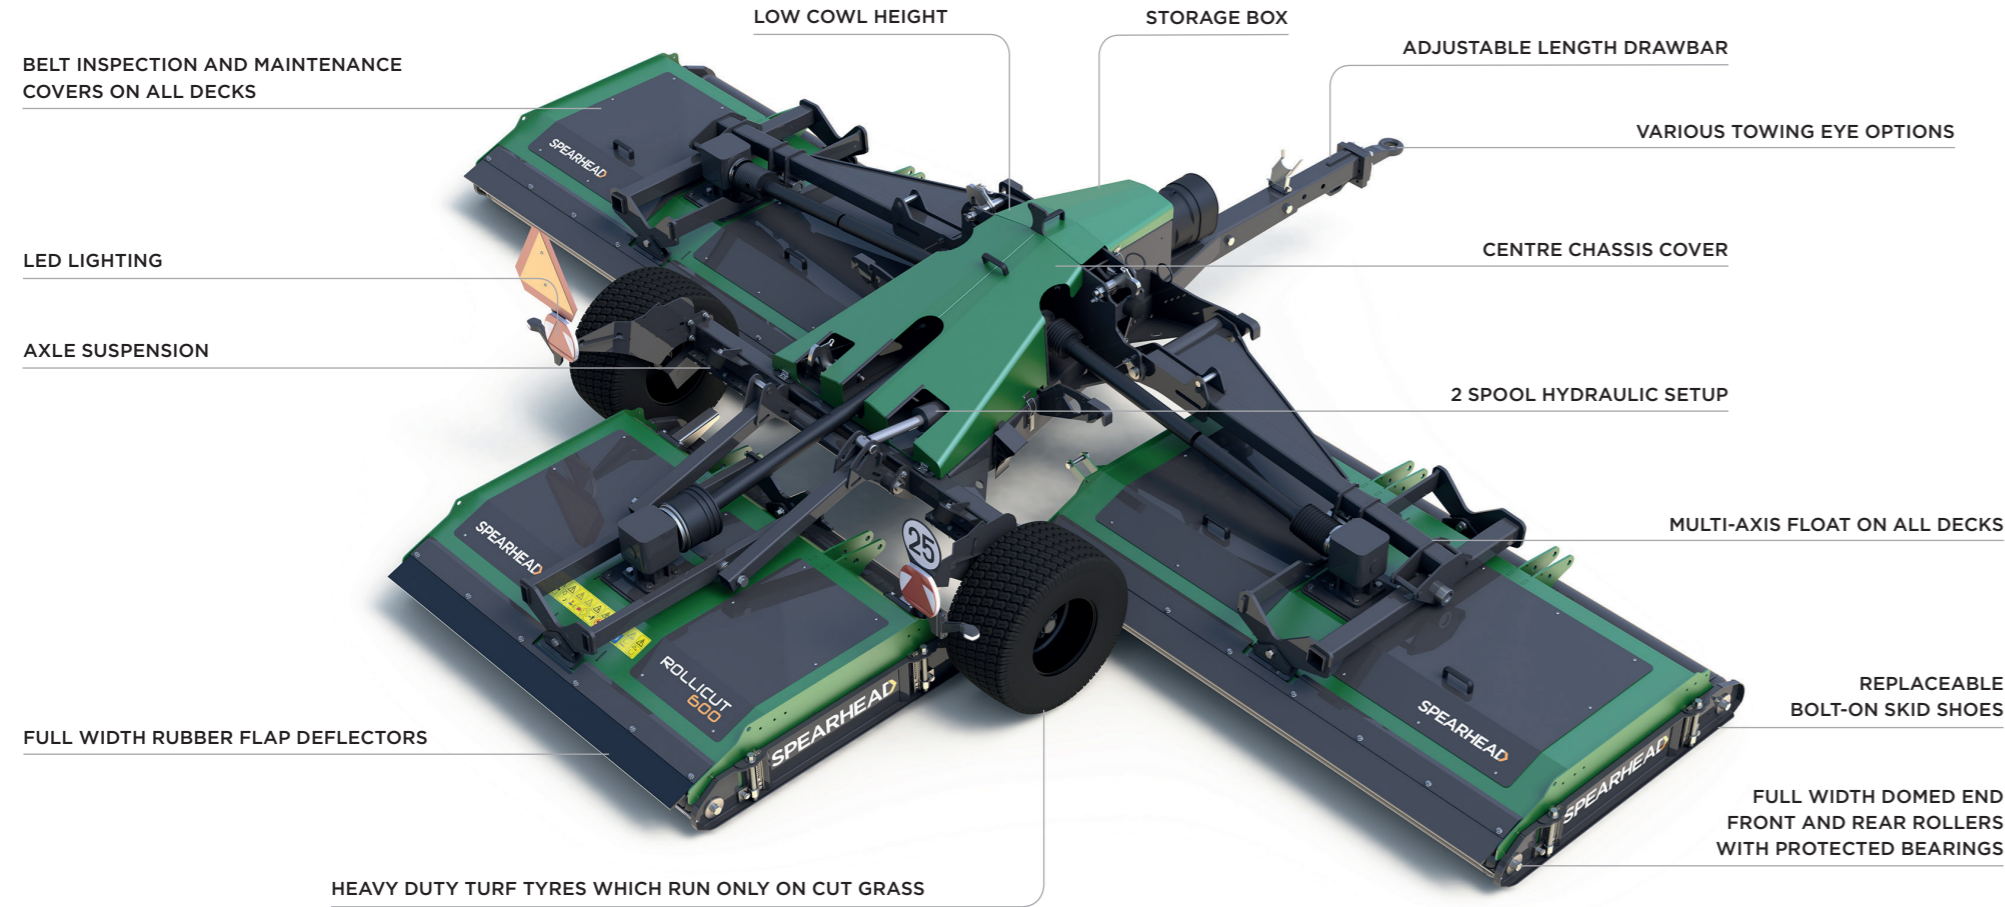

ROLLICUT 500/600 SOLID AND RELIABLE WITH A PERFECT FINISH

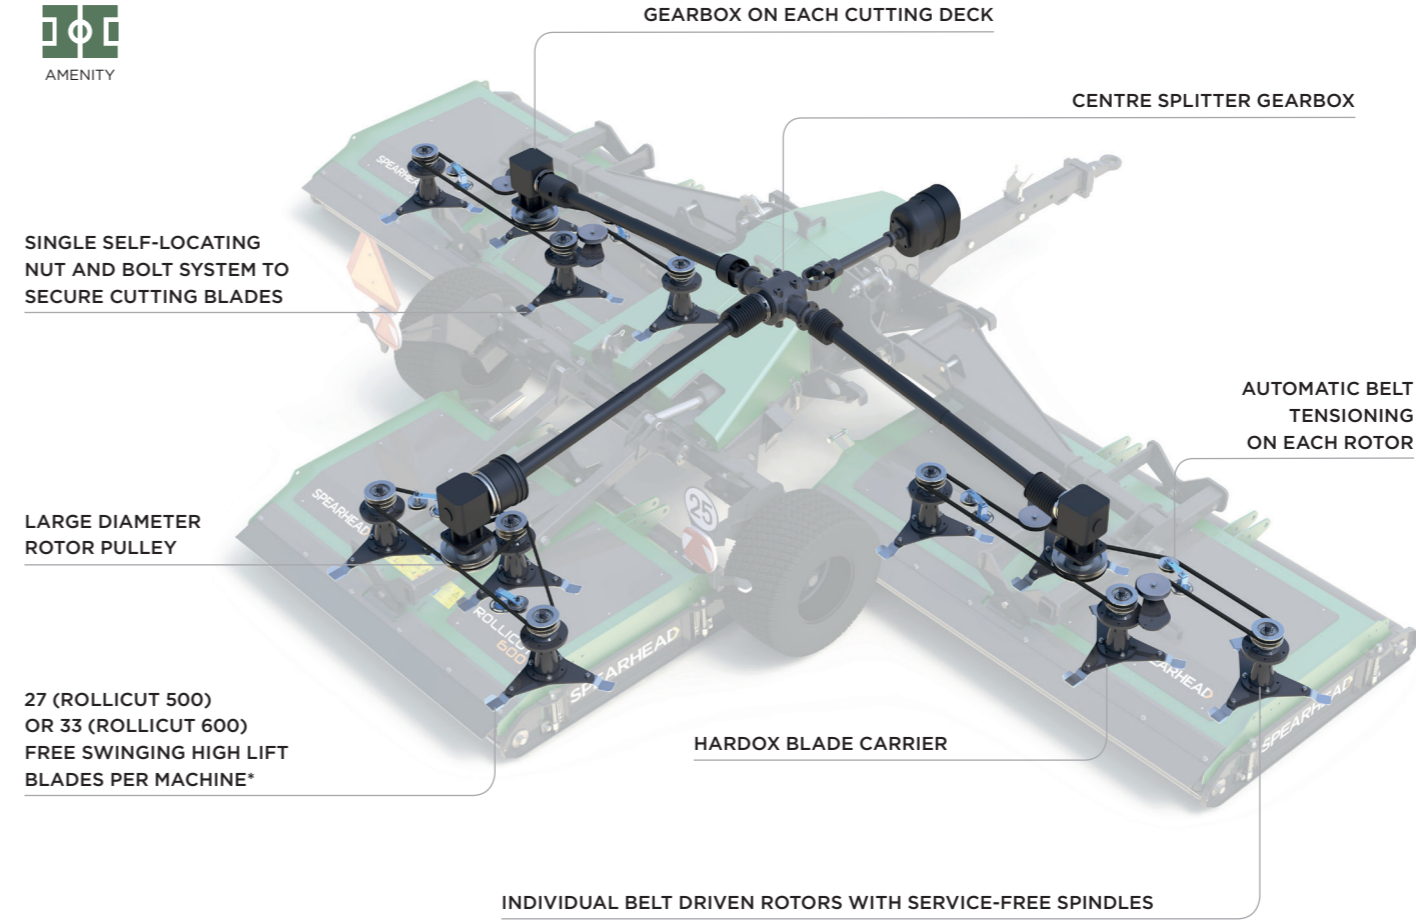

The Spearhead Rollicut triple gang mower is designed for light-duty amenity mowing and gives a high-quality finish in material up to 20mm. It excels in parkland, golf course, orchard and topping applications and is the perfect choice for mounting on compact tractors.

This Spearhead Rollicut triple gang range is available in either 5.0 or 6.0 metre cutting widths, featuring three, high suction styles blades per rotor designed to offer a comparable finish to conventional cylinder mowers; but without the expensive maintenance costs. The machine features impressive deck articulation following ground contours effectively to give a level cut and reduced scalping.

Self-tensioning belt drive gives reliable power transmission and with 168mm full width fine adjustment front and rear rollers, heavily baffled deck design and rear rubber flap, will ensure a fine mulch cut and well distributed finish.

27 (ROLLICUT 500) OR 33 (ROLLICUT 600) FREE SWINGING HIGH LIFT BLADES PER MACHINE*

* Rollicut 600 machine shown
Rollicut 500 machines feature three cutting rotors on all decks
Rollicut 600 machines feature four cutting rotors on wing decks and three cutting rotors on the rear deck

ROLLICUT 500

ROLLICUT 600

UNIT OPTIONS

HP TRACTOR HP	540 1000 PTO SPEED	TRANSPORT WIDTH	3-POINT LINKAGE MOUNTING	CUTTING WIDTH	BLADE TYPE	NUMBER OF BLADES	CUTTING HEIGHT
60hp (45kW)	540rpm	2.66m (8' 9")	✓	4.85m (15' 11")	Fine cut, high lift	27	0mm - 110mm (0" - 4.3")
70hp (53kW)	540rpm	2.66m (8' 9")	✓	5.99m (19' 8")	Fine cut, high lift	33	0mm - 110mm (0" - 4.3")
ROLLER SCRAPER WIRES	HYDRAULIC WING SAFETY LOCKS	FLASHING BEACON	MUDGUARD KIT	ROAD TYRES	SWIVEL TOWING EYE	K80 TOWING HITCH	

STANDARD SPECIFICATION	ROLLICUT 500	ROLLICUT 600
Machine weight	2500kg (5512lbs)	TBC
Hitch	Multi-positional drawbar with towing eye wear pad	Multi-positional drawbar with towing eye wear pad
Hitch position	Rear mount only	Rear mount only
Cutting width	4.85m (15' 11")	5.99m (19' 8")
Working width	4.97m (16' 4")	6.12m (20' 1")
Overall length	4.76m (15' 8")	4.76m (15' 8")
Cowl height	490mm (1' 8")	490mm (1' 8")
Transport width	2.66m (8' 9")	2.66m (8' 9")
Transport height	2.57m (8' 6")	3.13m (10' 4")
Cutting height	0mm – 110mm (0" – 4.3")	0mm – 110mm (0" – 4.3")
Cutting capacity	80mm (3.1")	80mm (3.1")
Wing working angles	45° up/15° down	45° up/15° down
Recommended tractor HP	60hp (45kW)	70hp (53kW)
Power take-off speed	540rpm	540rpm
Gearbox	Cast iron housing	Cast iron housing
Input shaft	1-3/8" Z6 and 35mm output shaft	1-3/8" Z6 and 35mm output shaft
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity [splitter]	TBC	TBC
Gearbox oil capacity [deck (x3)]	1.3 litres (2.3 pints)	1.3 litres (2.3 pints)
Cowl construction	All welded construction	All welded construction
Skid construction	Replaceable bolt-on skid	Replaceable bolt-on skid
Blades	Fine cut, high lift	Fine cut, high lift
Blade quantity	27	33
Blade tip speed	87m/s (17126 fpm)	87m/s (17126 fpm)
Roller diameter (front + rear)	168mm (6.5")	168mm (6.5")
Tyres	26 x 12 turf tyres	26 x 12 turf tyres

* With front and rear single chain guards ** Underside of deck to skid

SPEARHEAD

📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England ☎️ +44 (0)1789 491860

✉️ enquiries@spearheadmachinery.com 🌐 spearheadmachinery.com 🐦 f SpearheadWorld



designed and built in
GREAT BRITAIN

Spearhead
is a member of the
Alamo Group